


# Error codes and messages

Version 2.5

October 2019

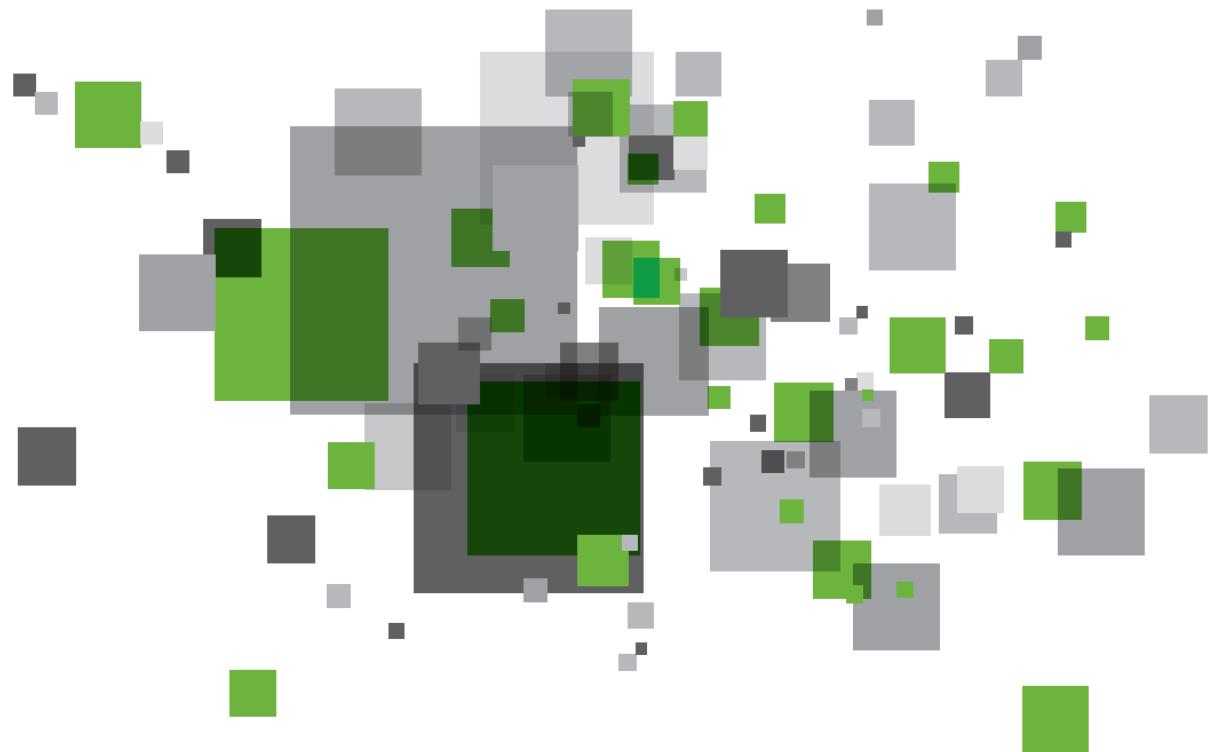

## 1 TABLE OF CONTENTS

1	Table of Contents.....	2
2	Version History .....	3
2.1	Introduction .....	<a href="#">54</a>
2.2	Audience.....	<a href="#">54</a>
3	Error codes and messages.....	<a href="#">65</a>
3.1	Http Status codes .....	<a href="#">65</a>
3.2	Extracting error codes and messages.....	<a href="#">76</a>
3.3	Known error codes and messages .....	<a href="#">87</a>
3.3.1	Error codes 0XXXX: Generic errors used in both Self-service Portal and Administration Portal. ....	<a href="#">98</a>
3.3.2	Error codes 1XXXX: Error codes used in Self-service Portal .....	<a href="#">1312</a>
3.3.3	Error codes 2XXXX: Error codes used in Administration Portal .....	<a href="#">1817</a>
3.3.4	Error codes 4XXXX: Error codes used in Update Agent .....	<a href="#">4039</a>
3.3.5	Error codes 5XXXX: Error codes used in Data Import .....	<a href="#">4847</a>
3.3.6	Error codes 6XXXX: Error codes used in Archive Agent .....	<a href="#">5352</a>
3.3.7	Error codes 7XXXX: Error codes used in Monitoring component in Administration Portal .....	<a href="#">5453</a>
3.3.8	Error codes 9XXXX: Error codes used in Switchboard .....	<a href="#">5554</a>
3.3.9	Error codes 10XXXX: Error codes used in Monitor web agent service.....	<a href="#">5857</a>
3.3.10	Error codes 11XXXX: Error codes used Service Deploy Agent   Self-service Portal .....	<a href="#">5958</a>
3.3.11	Error codes 12XXXX: Error codes used in SOAP Register Data Service .....	<a href="#">6261</a>
3.3.12	Error codes 13XXXX: Error codes used in SOAP Delivery Receipt Service.....	<a href="#">6463</a>
3.3.13	Error codes 14XXXX: Error codes used in Sanity Check .....	<a href="#">6665</a>
3.3.14	Error codes 15XXXX: Error codes used in other places .....	<a href="#">6766</a>
3.3.15	Error codes 16xxxx: Error codes used in events .....	<a href="#">6766</a>
3.3.16	Error codes 17XXXX: Error codes used in Authorization service .....	<a href="#">6867</a>
4	Event PUSH client status/error codes and messages .....	<a href="#">7069</a>

## 2 VERSION HISTORY

Date	Version	Comment	Status
08-05-15	1.0	First version of known error codes and messages added	Document created
12-05-15	1.1	Section describing how to extract the list of error codes and messages added	
13-05-15	1.2	Table with error codes and messages added.	Document sent to review by the customer
12-08-15	1.3	Table with error codes and messages updated after customer review	Document ready for release DL2/3A
14-08-15	1.4	First release	Ready for customer
31-08-15	1.5	Review comments from the customer implemented	
21-10-16	1.6	New error codes	
15-12-16	1.7	Corrected section 3.2.15	
20-02-17	1.8	New error codes	
10-04-17	1.9	Corrections	
18-04-17	2.0	Corrections	
10-05-17	2.1	Added section about http status codes	
14-06-17	2.2	Corrections	

---

27-07-17	2.3	Added Section regarding Event PUSH client
12-10-17	2.4	Added description of Event PUSH client error codes
29-10-19	2.5	Added REST exception for http 204 error code

---

## 2.1 Introduction

This document contains a list of the System's error codes with related messages and description. It also describes how to extract the list of error codes for upcoming releases.

## 2.2 Audience

The main audience of this document is the customer of Datafordeler project.

### 3 ERROR CODES AND MESSAGES

#### 3.1 Http Status codes

The following standard [http status code](#) are used by the components (mainly switchboard):

Status code	Status message	Description
200	OK	Standard response for successful HTTP requests. The actual response will depend on the request method used. In a GET request, the response will contain an entity corresponding to the requested resource. In a POST request, the response will contain an entity describing or containing the result of the action.
204	No Content	<p>The server successfully processed the request and is not returning any content.</p> <p>* This error code is not used by REST services. REST services will use error code 200 in this scenario.</p>
400	Bad Request	The server cannot or will not process the request due to an apparent client error (e.g., malformed request syntax, too large size, invalid request message framing, or deceptive request routing).
401	Unauthorized	Authentication is required and has failed or has not yet been provided. The response must include a WWW-Authenticate header field containing a challenge applicable to the requested resource.
403	Forbidden	The request was valid, but the server is refusing action. The user might not have the necessary permissions for a resource.
404	Not Found	The requested resource could not be found but may be available in the future. Subsequent requests by the client are permissible.
405	Method Not Allowed	A request method is not supported for the requested resource; for example, a GET request on a form that requires data to be presented via POST, or a PUT request on a read-only resource.


Status code	Status message	Description
500	Internal Server Error	A generic error message, given when an unexpected condition was encountered and no more specific message is suitable.[

### 3.2 Extracting error codes and messages


A tool for extracting error code, messages and descriptions is located in TFS source code in project *DataDistributor.Common\DataDistributor.ErrorHandling.MessagesExtractor*. The tool extracts mapping of error codes from xml file *DataDistributor.ErrorHandling\DataDistributor.ErrorHandling\ErrorsCodes.xml* and messages in error message resource *DataDistributor.ErrorHandling\DataDistributor.ErrorHandling\Resources>ErrorMessages.resx*. The tool populates the result in c:\messages.txt separated with '|' character.

To copy the result into this document first import data from the text file into an existing Microsoft Excel worksheet as an external data range by doing the following steps:

1. Open Microsoft Excel.
2. Click on the cell where you want to put the data from the text file.
3. On the **Data** tab, in the **Get External Data** group, click **From Text**

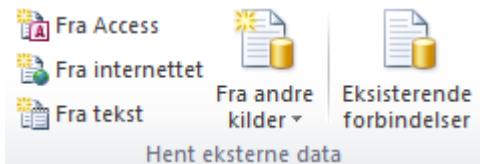

4. Locate and double-click the text file in c:\messages.txt to start the import wizard.
5. Follow the instructions in the Text Import Wizard.
6. In Step 2 of the Text Import Wizard Change the delimiter that is used for a delimited text file from a TAB character to '|' character and click **Next**.



7. When you are done with the steps in the wizard, click **Finish** to complete the import operation..
8. In the Import Data dialog box click **OK**.
9. Select the area to copy and copy to the clipboard.

To insert the data in the table in section 3.2 mark the exact same number of rows and columns as you copied and paste the content from the clipboard to insert the data.

### 3.3 Known error codes and messages

- Error codes 6XXX : General Errors raising alarms
- Error codes 0XXXX : Generic errors used in both Self-service Portal and Administration Portal.
- Error codes 1XXXX : Error codes used in Self-service Portal
- Error codes 2XXXX : Error codes used in Administration Portal
- Error codes 4XXXX : Error codes used in Update Agent
- Error codes 5XXXX : Error codes used in Data Import
- Error codes 6XXXX : Error codes used in Archive Agent
- Error codes 7XXXX : Error codes used in Monitoring component in Administration Portal
- Error codes 9XXXX : Error codes used in Switchboard
- Error codes 10XXXX : Error codes used in Monitor web agent service
- Error codes 11XXXX : Error codes used Service Deploy Agent I Self-service Portal
- Error codes 12XXXX : Error codes used in SOAP Register Data Service
- Error codes 13XXXX : Error codes used in SOAP Delivery Receipt Service
- Error codes 14XXXX : Error codes used in Sanity Check
- Error codes 15XXXX : Error codes used in other places
- Error codes 16XXXX : Error codes used in Events
- Error codes 17XXXX : Error codes used in Authorization Service

**3.3.1 ERROR CODES 6XXX: GENERAL ERRORS RAISING ALARMS**

Error code	Error message	Description
6001	A {specific agent type} agent is not running	Logges når en given agent type ikke kører
6002	Switchboard error	Switchboard fejl
6003	Service responds to slowly	En service svarer for langsomt
6004	Service has to many errors	En service har logget for mange fejl
6005	Replication channel is in faulted state	En replikeringskanal er i channelStatus = 4
6006	Replication channel hasn't received new file	En replikeringskanal har ikke modtaget nogen ny fil

**3.3.2 ERROR CODES 0XXXX: GENERIC ERRORS USED IN BOTH SELF-SERVICE PORTAL AND ADMINISTRATION PORTAL.**

Error code	Error message	Description
00000	Unknown Error	Anvendes, når systemet giver en ukendt fejl.
00001	Exception manager error	Anvendes, når systemet giver en fejl i fejladministrationsprogrammet.
00002	Unable to find error description	Anvendes, når systemet ikke kan mappe en fejl til en fejlkode.
00003	Client side javascript error	Client side javascript error
00100	Telefon feltet må ikke være tomt og skal indeholde et tal på mellem 4 og 30 cifre.	Valideringsbesked der gives, hvis krævet telefon ikke er angivet.
00101	Telefonnummeret skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis telefonnummer overstiger det tilladte antal karakterer i Active Directory.
00102	E-mail feltet må ikke være tomt og skal indeholde en gyldig e-mailadresse.	Valideringsbesked der gives, hvis krævet e-mail ikke er angivet.
00103	E-mail feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet e-mail ikke er angivet.
<b>00104</b>	Test	Test
00200	Din browser identifierer sig ikke som en af de browsere systemet supporterer. Du benytter {0} version {1}. Systemet kræver minimum version {2} af denne browser. Opgrader venligst din browser for fuld understøttelse af systemets funktioner.	Valideringsbesked der gives, hvis den anvendte browser version ikke er understøttet.

Error code	Error message	Description
00201	Systemet understøttes ikke i den anvendte browser {0}. Anvend venligst en af følgende browsere: {1}	Valideringsbesked der gives, hvis den anvendte browser ikke er understøttet.
00202	Din browser understøtter ikke JavaScript. Hvis JavaScript er deaktivert i din browser skal du slå det til og opdatere denne side. Ellers kan du åbne siden i en anden browser.	Valideringsbesked der gives, hvis den anvendte browser ikke understøtter JavaScript eller JavaScript er slået fra.
00203	Fejl på formular	Valideringsbesked der gives, hvis der er fejl på formular.
00204	Tekst er ikke valid.	Valideringsbesked der gives, hvis input indeholder systemkritisk tekst.
00205	Inconsistent data	Inconsistent data
00206	Du har ikke tilladelse til at udføre denne funktion. Hvis du mener at du bør have tilladelse til dette, kontakt da venligst din registeransvarlige administrator	Unauthorized access
00207	Unsupported Authentication Method	Unsupported Authentication Method
00208	The remote server returned an error	The remote server returned an error
00209	The web request has timed out	The web request has timed out
00210	There was an SQL error	There was an error while connecting to MSSQL database
00211	Invalid Public Key value. It has to start with '---- BEGIN SSH2 PUBLIC KEY ----' and end with '---- END SSH2 PUBLIC KEY ----'.	Invalid Public Key value. It has to start with '---- BEGIN SSH2 PUBLIC KEY ----' and end with '---- END SSH2 PUBLIC KEY ----'.
<b>00212</b>	There was an error while connecting to Postgres database	There was an error while connecting to Postgres database

Error code	Error message	Description
<b>00213</b>	There was a data related error while communicating with a database	There was a data related error while communicating with a database

### 3.3.3 ERROR CODES 1XXXX: ERROR CODES USED IN SELF-SERVICE PORTAL

Error code	Error message	Description
10098	Din webbruger er endnu ikke aktiveret. Venligst aktiver ved at følge aktiveringslinket i den e-mail du har fået tilsendt i forbindelse med oprettelsen.	Din webbruger er endnu ikke aktiveret. Venligst aktiver ved at følge aktiveringslinket i den e-mail du har fået tilsendt i forbindelse med oprettelsen.
10099	Din webbruger blev ikke aktiveret indenfor den gyldige periode. Ønsker du at anmode om et nyt aktiveringslink?	Din webbruger blev ikke aktiveret indenfor den gyldige periode. Ønsker du at anmode om et nyt aktiveringslink?
10100	Adgangskoden og adgangskode bekræftelse matcher ikke.	Valideringsbesked der gives, hvis adgangskode og den gentagede adgangskode ikke stemmer overens.
10101	Adgangskoden skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis adgangskode overstiger det tilladte antal karakterer i Active Directory.
10102	Fornavn feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet fornavn ikke er angivet.
10103	Fornavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis fornavn overstiger det tilladte antal karakterer i Active Directory.
10104	Efternavn feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet efternavn ikke er angivet.
10105	Efternavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis efternavn overstiger det tilladte antal karakterer i Active Directory.
10106	Virksomhedsnavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis virksomhed overstiger det tilladte antal karakterer i Active Directory.

Error code	Error message	Description
10107	Vej feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet vejnavn ikke er angivet.
10108	Vejnavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis vejnavn overstiger det tilladte antal karakterer i Active Directory.
10109	Postnummeret skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis postnummer overstiger det tilladte antal karakterer i Active Directory.
10110	Bynavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis by overstiger det tilladte antal karakterer i Active Directory.
10111	Vælg venligst et land.	Valideringsbesked der gives, hvis krævet land ikke er angivet.
10112	Landenavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis land overstiger det tilladte antal karakterer i Active Directory.
10113	E-mailadressen skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis e-mail overstiger det tilladte antal karakterer i Active Directory.
10114	Det valgte certifikatet er ikke i et gyldigt format. Gyldige formater er: .CER og .CRT	Valideringsbesked der gives, hvis certifikat på en tjenestebruger ikke overholder et givent format.
10115	Certifikatet indeholder en privat nøgle.	Valideringsbesked der gives, hvis certifikat på en tjenestebruger indeholder en privat nøgle.
10116	Certifikatet er ikke gyldigt endnu.	Valideringsbesked der gives, hvis certifikat på en tjenestebruger har en gyldighedsdato, der ligger frem i tiden.
10117	Certifikatet er udløbet, og er derfor ikke gyldigt. Det udløb {0:d}	Valideringsbesked der gives, hvis certifikat på en tjenestebruger har en udløbsdato, der ligger tilbage i tiden.

Error code	Error message	Description
10118	Certifikatet er ikke af typen {0}. Vælg venligst et certifikat af denne type.	Valideringsbesked der gives, hvis certifikat på en tjenestebruger ikke overholder et givent format.
10119	Virksomhed feltet må ikke være tomt	Valideringsbesked der gives der gives, hvis krævet virksomhed ikke er angivet.
10120	Adgangskoden skal være mellem 8 og 20 karakterer lang og indeholde mindst 3 af følgende 4 regler: store bogstaver/små bogstaver/tal/specialtegn.	Valideringsbesked der gives, hvis krævet adgangskode ikke overholder et givent regelsæt.
10121	Web-brugerprofil blev ikke oprettet!	Fejlbesked der gives, hvis en web-bruger ikke kunne oprettes pga. systemfejl.
10122	Linket til nulstilling af adgangskode er udløbet. Anmod venligst om at få tilsendt et nyt link.	Fejlbesked der gives, hvis et link til nulstilling af adgangskode tilgås efter det er udløbet.
10123	Der er ikke adgang til web-brugeren.	Fejlbesked der gives, hvis ikke eksisterende web-bruger forsøges tilgået.
10124	Følgende tegn: {0} er ikke tilladt	Valideringsbesked der gives, hvis input indeholder ikke tilladte tegn.
10125	Tjenestebrugeren {0} findes ikke	Fejlbesked der gives, hvis ikke eksisterende tjenestebruger forsøges tilgået.
10126	By feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet by ikke er angivet.
10127	Der opstod en fejl under afsendelsen af anmodningen om adgang til tjenesten.	Fejlbesked der gives, hvis der opstod en fejl under afsendelsen af anmodningen om adgang til en tjeneste.
10128	Linket til webbruger aktivering er udløbet. Anmod venligst om at få tilsendt et nyt link.	Fejlbesked der gives, hvis et link til aktivering af webbruger tilgås efter det er udløbet.

Error code	Error message	Description
10129	Det valgte certifikat er allerede tilknyttet til en eksisterende tjenestebruger. Venligst vælg et andet.	Valideringsbesked der gives, hvis et certifikat der overføres til en tjenestebruger allerede er tilknyttet en anden tjenestebruger. Et certifikat må kun tilknyttes én tjenestebruger.
10130	Linket til nulstilling af adgangskode er ugyldigt. Venligst følg aktiveringslinket i den e-mail du har fået tilsendt i forbindelse med skift af adgangskoden.	Fejlbesked der gives, hvis et ugyldigt eller modifieret link til nulstilling af adgangskode tilgås.
10131	InvalidPasswordResetRequest	Fejlbesked der gives, hvis et link til nulstilling af adgangskode er fejlbehæftet. Prøv evt. at kopiere hele linket og sætte det direkte ind i en browser i stedet for at tilgå linket via klik.
10132	Service user required	Valideringsbesked der gives, hvis krævet tjenestebruger ikke er angivet.
10133	Delivery type required	Valideringsbesked der gives, hvis krævet leveringstype ikke er angivet.
<b>10134</b>	You have no permissions to operate on service use	You have no permission to operate on service user
<b>10135</b>	You have no permissions to operate on event message type	You have no permissions to operate on event message type
<b>10136</b>	You have no permissions to operate on logical data model class	You have no permissions to operate on logical data model class
<b>10137</b>	Subscription doesn't exist	Subscription doesn't exist
<b>10138</b>	Visningsnavn må ikke være tomt	FileDownload subscription name is required
<b>10139</b>	Vælg venligst en abonnementstype.	Please choose subscription type
<b>10140</b>	Visningsnavn på hændelser ud tjenestebruger du har valgt er allerede i	Visningsnavn på hændelser ud tjenestebruger du har valgt er allerede i brug. Vælg venligst et

Error code	Error message	Description
	brug. Vælg venligst et andet visningsnavn på hændelser ud tjenestebrugerne.	andet visningsnavn på hændelser ud tjenestebrugerne.
<b>10141</b>	IP-adresse har ugyldigt format	IP address format is invalid
10142	IP address required	IP address required
10143	Service or file download is required	Please choose Service, Filedownload or both
10144	Event message type required	Venligst angiv Beskedtype
10145	Web user company pattern	Comany name must only contain letters, digits, & , . , and -.
<b>10146</b>	The email address provided does not match the initial new email address.	The email address provided does not match the initial new email address.
<b>10147</b>	PIN-Koden er ikke gyldig.	The PIN is invalid.
<b>10148</b>	PIN koden er ikke længere gyldig.	The PIN is outdated.
10149	Du har opbrugt antallet af forsøg.	You reached the maximum number of retries allowed.
10150	Du skal acceptere samtykkebetingelserne for at kunne oprette en webbruger.	You have to accept the terms of consent in order to be able to create a webuser.
10151	Du skal acceptere brugervilkårene for at kunne oprette en webbruger.	You have to accept the terms of use in order to be able to create a webuser.
10152	Denne e-mailadresse er allerede brugt.	This email address is already in use.

### 3.3.4 ERROR CODES 2XXXX: ERROR CODES USED IN ADMINISTRATION PORTAL

Error code	Error message	Description
20099	Registermyndighedsnavn feltet må ikke være tomt og skal indeholde en alfanumerisk værdi mellem 1 og 100 karakterer.	Registermyndighedsnavn feltet må ikke være tomt og skal indeholde en alfanumerisk værdi mellem 1 og 100 karakterer.
20100	Registermyndighedsnavn feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet registermyndighedsnavn ikke er angivet.
20101	Registermyndighedsnavn skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis registermyndighedsnavn overstiger det tilladte antal karakterer i databasen.
20102	Kortnavn feltet må ikke være tomt og skal indeholde en alfanumerisk værdi mellem 1 og 100 karakterer.	Valideringsbesked der gives, hvis krævet kortnavn for en registermyndighed ikke er angivet.
20103	Vejnavn og husnummer feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet postnummer ikke er angivet.
20104	Vejnavn og husnummer skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis adresse for en registermyndighed overstiger det tilladte antal karakterer i databasen.
20105	Bynavn feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet bynavn ikke er angivet.
20106	Bynavn skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis bynavn for en registermyndighed overstiger det tilladte antal karakterer i databasen.

Error code	Error message	Description
20107	Postnummer feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet postnummer ikke er angivet.
20108	Postnummer skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis postnummer for en registermyndighed overstiger det tilladte antal karakterer i databasen.
20109	Telefonnummeret skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis telefonnummer for en registermyndighed overstiger det tilladte antal karakterer i databasen.
20110	Fax feltet skal indeholde et tal på mellem 4 og 30 cifre.	Valideringsbesked der gives, hvis faxnummer er for kort eller for langt
20111	Faxnummeret skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis faxnummer for en registermyndighed overstiger det tilladte antal karakterer i databasen.
20112	E-mailadressen skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis e-mailadressen for en registermyndighed overstiger det tilladte antal karakterer i databasen.
20113	Replikeringskanalsident feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet ident for replikeringskanal ikke er angivet.
20114	Replikeringskanalsident skal være et tal mellem 0 og {0}.	Valideringsbesked der gives, hvis ident for replikeringskanal overstiger max int værdi.
20115	Beskrivelse skal være mindre end 255 tegn.	Valideringsbesked der gives, hvis beskrivelse for replikeringskanal

Error code	Error message	Description
		overstiger det tilladte antal karakterer i databasen.
20116	Leverancetype feltet må ikke være tomt.	Valideringsbesked der gives, hvis leverancetype for replikeringskanal ikke er angivet.
20117	Opdateringsagent feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet opdateringsagent ikke er angivet.
20118	Vælg venligst en type.	Valideringsbesked der gives, hvis krævet datatype ikke er valgt ifm. mapning af tabulær data.
20119	Den valgte XSD fil indeholder en data type for {0}, der ikke er understøttet.	Valideringsbesked der gives, hvis en given datatype ikke er understøttet ifm. mapning af tabulær data.
20120	SRID skal angives som et tal	Valideringsbesked der gives, hvis SRID ikke er angivet som et tal ifm. mapning af tabulær data.
20121	Angiv SRID for {0}	Valideringsbesked der gives, hvis krævet datatype ikke er valgt ifm. mapning af tabulær data.
20122	SRID skal være mindre eller lig med 32766	Valideringsbesked der gives, hvis SRID overstiger den tilladte værdi ifm. mapning af tabulær data.
20123	Den valgte XSD fil kunne ikke indlæses.	Fejlbesked der gives, hvis udpeget XDS fil ikke kunne indlæses ifm. mapning af tabulær data.
20124	Angiv venligst feature type for {0}.	Valideringsbesked der gives, hvis krævet geometrytype ikke er angivet ifm. mapning af tabulær data.

Error code	Error message	Description
20125	Angiv venligst præcision for {0}.	Valideringsbesked der gives, hvis krævet præcision ikke er angivet ifm. mapning af tabulær data.
20126	Valideringsbesked der gives, hvis navne på tabeller ikke er unikke ifm. mapning af tabulær data.	Valideringsbesked der gives, hvis navne på tabeller ikke er unikke ifm. mapning af tabulær data.
20127	Antallet af cifre i alt skal være højere end eller lig med antallet af decimaler.	Valideringsbesked der gives, hvis antallet af cifre for præcision i alt ikke er højere end eller lig med antallet af decimaler ifm. mapning af tabulær data.
20128	Præcisionstal for {0} skal være mindre end eller lig med {1}.	Valideringsbesked der gives, hvis præcision overstiger den tilladte værdi ifm. mapning af tabulær data.
20129	Præcisionen for {0} skal angives som et ikke-negativt heltal.	Valideringsbesked der gives, hvis præcision ikke er angivet som et tal ifm. mapning af tabulær data.
20130	Overfør venligst en XSD fil.	Valideringsbesked der gives, hvis krævet XSD fil ikke er udpeget og overført ifm. mapning af tabulær data.
20131	Arkiveringsagent feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet arkiveringsagent ikke er angivet.
20132	Replikeringskanalsident skal angives som et tal.	Valideringsbesked der gives, hvis ident for replikeringskanal ikke er angivet som et tal.
20133	Den replikeringskanalsident du har valgt er allerede i brug. Vælg venligst en anden replikeringskanalsident.	Valideringsbesked der gives, hvis der forsøges oprettet en

Error code	Error message	Description
		replikeringskanal med en ident, der allerede findes i systemet.
20134	Det rollenavn du har valgt er allerede i brug. Vælg venligst et andet rollenavn.	Valideringsbesked der gives, hvis der forsøges oprettet en rolle med et navn, der allerede findes i systemet.
20135	Rolle id feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet rolle id ikke er angivet.
20136	Rollenavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis rollenavn overstiger det tilladte antal karakterer i Active Directory.
20137	Navn på rolle feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet rollenavn ikke er angivet.
20138	Navn på rolle kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Valideringsbesked der gives, hvis rollenavn ikke overholder et givent regelsæt.
20139	Venligst angiv rolletype for rollen.	Valideringsbesked der gives, hvis krævet rolletype ikke er angivet.
20140	Venligst angiv tilhører register for rollen.	Valideringsbesked der gives, hvis krævet tilhørende register for rolle ikke er angivet.
20141	Navn på profil må ikke være tomt	Valideringsbesked der gives, hvis krævet profilnavn ikke er angivet.
20142	Registermyndighedsnavn feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet kortnavn for registermyndighed ikke er angivet.
20143	Kortnavn skal være mindre end 100 tegn.	Valideringsbesked der gives, hvis kortnavn for registermyndighed

Error code	Error message	Description
		overstiger det tilladte antal karakterer i databasen.
20144	Registermyndighed med samme navn er allerede registreret. Angiv venligst et andet navn.	Valideringsbesked der gives, hvis der forsøges oprettet en registermyndighed med et navn, der allerede findes i systemet.
20145	Præcisionen for {0} må ikke være 0.	Valideringsbesked der gives, hvis præcisionen for varchar eller char type er sat til 0.
20146	Error while handling state changed event	Intern fejlbesked der gives ifm. håndtering af ændret status for en replikeringsskanal.
20147	Cannot find replication channel with ID {0}, cannot change sequence number	Intern fejlbesked der gives, hvis sekvensnummer ikke kan ændres pga. replikerings kanal ikke kan findes på ID.
20148	Error while handling sequence number changed event	Intern fejlbesked der gives, hvis sekvensnummer ikke kan ændres.
20149	Error while handling update agent started event	Intern fejlbesked der gives, hvis update agent ikke kan aktiveres.
20150	{0} feltet må ikke være tomt.	Generisk valideringsbesked der gives, hvis krævet værdi ikke er angivet.
20151	Angiv venligst en gyldig IP adresse.	Valideringsbesked der gives, hvis IP adresse er ugyldig.
20152	Det feltnavn du har valgt er allerede i brug. Vælg venligst et andet feltnavn.	Valideringsbesked der gives, hvis navne felter ikke er unikke ifm. mapning af tabulær data.

Error code	Error message	Description
20153	Venligst vælg en primærnøgle for {0}.	Valideringsbesked der gives, hvis der ikke er valgt en primærnøgle for en tabel ifm. mapning af tabulær data.
20154	Angiv venligst et webbrugernavn eller et brudstykke heraf der skal søges på.	Valideringsbesked der gives, hvis web-brugernavn ikke er udfyldt ved søgning.
20155	Gældende til feltet må ikke være tomt.	Valideringsbesked der gives, hvis der ikke er angivet en dato for hvornår en tidsbegrænset web-bruger er gældende til.
20156	Data authority kortnavn required	Valideringsbesked der gives, hvis krævet kortnavn for registermyndighed ikke er angivet.
20157	Fra tid feltet må ikke være tomt.	Valideringsbesked der gives, hvis datointerval er ugyldigt for søgning i monitorering pga. fra dato ikke er angivet.
20158	Til tid feltet må ikke være tomt.	Valideringsbesked der gives, hvis datointerval er ugyldigt for søgning i monitorering pga. til dato ikke er angivet.
20159	Venligst angiv tilhører register for profilen.	Valideringsbesked der gives, hvis krævet tilhørende register for profil ikke er angivet.
20160	Profilnavn skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis profilnavn overstiger det tilladte antal karakterer i Active Directory.

Error code	Error message	Description
20161	Navn på profil kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Valideringsbesked der gives, hvis rollenavn ikke overholder et givent regelsæt.
20162	tjeneste privilegium navn kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Valideringsbesked der gives, hvis tjeneste privilegium navn ikke overholder et givent regelsæt.
20163	Constraint navn kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Valideringsbesked der gives, hvis constraint navn ikke overholder et givent regelsæt.
20164	Det profilnavn du har valgt er allerede i brug. Vælg venligst et andet profilnavn.	Valideringsbesked der gives, hvis der forsøges oprettet en profil med et navn, der allerede findes i systemet.
20165	Filen må ikke være større end {0} bytes	Valideringsbesked der gives, hvis der forsøges at uploadet en stor fil.
20166	Navn på tjeneste feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet navn på tjeneste ikke er angivet.
20167	Tjenesteverision feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet tjenesteverision på tjeneste ikke er angivet.
20168	Venligst angiv tilhørende register for tjenesten.	Valideringsbesked der gives, hvis krævet tilhørende register for en tjeneste ikke er angivet.
20169	Venligst angiv tjenestetype.	Valideringsbesked der gives, hvis krævet tjenesteverision på tjeneste ikke er angivet.
20170	Profilen findes ikke.	Fejlbesked der gives, hvis ikke eksisterende profil forsøges tilgået.

Error code	Error message	Description
20171	Tjenestebrugeren findes ikke.	Fejlbesked der gives, hvis ikke eksisterende tjenestebruger forsøges tilgået.
20172	Web-brugeren findes ikke.	Fejlbesked der gives, hvis ikke eksisterende web-bruger forsøges tilgået.
20173	Querying without providing a ParentUserName is not supported	Querying without providing a ParentUserName is not supported
20174	Venligst angiv kun e-mail eller brugernavn i forbindelse med forespørgslen.	Forespørgslen understøtter ikke et kald uden angivelse af hverken e-mail eller brugernavn eller et kald med angivelse af både e-mail og brugernavn.
20175	Det er ikke tilladt at slette systemskabte begrænsninger.	Valideringsbesked, der gives, hvis en systemskab begrænsning forsøges slettet fra en tjeneste.
20176	Det er ikke tilladt at slette begrænsninger tildelt andre tjenester.	Valideringsbesked, der gives, hvis en begrænsning tildelt flere tjenester forsøges slettet fra en tjeneste.
20177	Det er ikke tilladt at opdatere systemskabte begrænsninger.	Valideringsbesked, der gives, hvis en systemskab begrænsning forsøges opdateret på en tjeneste.
20178	Det er ikke tilladt at opdatere typen for begrænsninger tildelt andre tjenester.	Valideringsbesked, der gives, hvis typen for en begrænsning tildelt flere tjenester forsøges opdateret på en tjeneste.
20179	Beskrivelse kan bestå af en kombination af store bogstaver små bogstaver tal og tegnsætningstegn.	Beskrivelse kan bestå af en kombination af store bogstaver små bogstaver tal og tegnsætningstegn.

Error code	Error message	Description
20180	MaxY feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet MaxY ikke er angivet.
20181	Default MinX feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet MinX ikke er angivet.
20182	MaxY feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet MaxX ikke er angivet.
20183	MinY feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet MinY ikke er angivet.
20184	Constraint navn kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Valideringsbesked der gives, hvis krævet navn på begrænsning ikke er angivet.
20185	Type af afgrænsning feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet type af afgrænsning ikke er angivet.
20186	Niveau af afgrænsning feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet niveau af afgrænsning ikke er angivet.
20187	Lag feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet lag ikke er angivet
20188	Entitet feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet entitet ikke er angivet.
20189	Attribut feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet attribut ikke er angivet.
20190	Filterpolygon feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet filterpolygon ikke er angivet.

Error code	Error message	Description
20191	'MaxX' skal være større end 'MinX' og 'MaxYX' skal være større end 'MinY'.	Value of MaxX must be bigger than value of MinX and value of MaxY must be bigger than value of MinY.
20192	MaxY skal angives som et tal.	Valideringsbesked der gives, hvis den maximale værdi af Y-koordinatet ikke er angivet som et tal.
20193	MinX skal angives som et tal.	Valideringsbesked der gives, hvis den minimale værdi af X-koordinatet ikke er angivet som et tal.
20194	Default MaxX skal angives som et tal.	Valideringsbesked der gives, hvis den maximale værdi af X-koordinatet ikke er angivet som et tal.
20195	Default MinY skal angives som et tal.	Valideringsbesked der gives, hvis den minimale værdi af Y-koordinatet ikke er angivet som et tal.
20196	En lignende begrænsning findes allerede. Angiv venligst et andet navn, type, niveau eller værdi.	Valideringsbesked der gives, hvis der forsøges oprettet en begrænsning med et navn, type, niveau og værdi, der allerede findes i systemet.
20197	Venligst angiv Objekt for hændelsen	Valideringsbesked der gives, hvis krævet objekt for hændelse ikke er angivet.
20198	Hændelse feltet må ikke være tomt	Valideringsbesked der gives, hvis krævet navn på hændelse ikke er angivet.
20199	Hændelse kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Valideringsbesked der gives, hvis navn på hændelse ikke overholder et givent regelsæt.

Error code	Error message	Description
20200	Hændelse skal være mindre end 30 tegn.	Valideringsbesked der gives, hvis navn på hændelse overstiger det tilladte antal karakterer i databasen.
20201	Kildesystem kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Valideringsbesked der gives, hvis kildesystem ikke overholder et givent regelsæt.
20202	Kildesystem feltet må ikke være tomt	Valideringsbesked der gives, hvis krævet kildesystem ikke er angivet.
20203	Kildesystem skal være mindre end 64 tegn.	Valideringsbesked der gives, hvis kildesystem overstiger det tilladte antal karakterer i databasen.
20204	Hændelsestype feltet må ikke være tomt	Valideringsbesked der gives, hvis krævet hændelsestype ikke er angivet.
20205	Venligst angiv datamodel for hændelsen.	Valideringsbesked der gives, hvis krævet datamodel ikke er angivet.
20206	Den nye version af tjenesten må ikke være lavere eller lig med den forrige, som er {0}	Valideringsbesked der gives, hvis en tjeneste versioneres til ny version, der er lavere eller lig med den nuværende. Det nye versionsnummer skal være højere en tidligere version og samtidig ikke lig med eksisterende, højere versioner.
20207	Den nye version af tjenesten må ikke være lig med højere, eksisterende versioner.	Valideringsbesked der gives, hvis en tjeneste versioneres til ny, højere version, der allerede er i brug. Det nye versionsnummer skal være højere en tidligere version og samtidig ikke lig med eksisterende, højere versioner.

Error code	Error message	Description
20208	Visningsnavn på tjeneste feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet visningsnavn på tjeneste ikke er angivet.
20209	Visningsnavn feltet må ikke være tomt	Valideringsbesked der gives, hvis krævet visningsnavn på hændelse ikke er angivet.
20210	Visningsnavn på hændelser feltet må ikke være tomt.	Visningsnavn på hændelser feltet må ikke være tomt.
20211	Map fil feltet må ikke være tomt.	Valideringsbesked der gives, hvis krævet map fil ikke er angivet.
20212	Valideringsbesked der gives, hvis krævet leveringsformat ikke er angivet.	Leveringsformat feltet må ikke være tomt.
20213	Primary mappings model is required.	Primary data model is required
20214	Join between tables exists.	Entity join exists
20215	Visningsnavn må ikke være tomt.	FileDownload subscription name is required
20216	Navn må ikke være tomt.	Navn må ikke være tomt.
20217	Beskrivelse må ikke være tomt	Beskrivelse må ikke være tomt
20218	FME Workspace Fil må ikke være tomt.	FileDownload subscription type name may consist of a combination of lowercase and uppercase letters as well as numbers and hyphen.
20219	Autorisation må ikke være tomt.	Autorisation må ikke være tomt.
20220	Følsomme data må ikke være tomt.	Følsomme data må ikke være tomt.

Error code	Error message	Description
20221	Minimumsinterval må ikke være tomt.	Minimumsinterval må ikke være tomt.
20222	Lagringstid må ikke være tomt.	Lagringstid må ikke være tomt.
20223	Arkiveringstid må ikke være tomt.	Arkiveringstid må ikke være tomt.
20224	Navnet for filudtrækket må bestå af en kombination af små og store bogstaver.	FileDownload subscription type name may consist of a combination of lowercase and uppercase letters as well as numbers and hyphen.
20225	Aliasser skal overholde følgende regelsæt "EPSG:<nummer>", f.eks. EPSG:3587	Tiling schema alias does not meet pattern requirements
20226	Aliasser skal overholde følgende regelsæt "EPSG:<nummer>", f.eks. EPSG:3587	Tiling schema alias does not meet pattern requirements
20227	Tiling schema projection is required	Tiling schema projection is required
20228	Tiling schema projection unit is required	Tiling schema projection unit is required
20229	Tiling schema tile size must only contain digits	Tiling schema tile size must only contain digits
20230	Tiling schema tile size is required	Tiling schema tile size is required
20231	Tiling schema tile size must only contain digits	Tiling schema tile size must only contain digits
20232	Tiling schema tile size is required	Tiling schema tile size is required
20233	Tiling schema name must be less than 30 characters	Tiling schema name must be less than 30 characters
20234	Tiling schema name must only contain letters, digits and '-'	Tiling schema name must only contain letters, digits and '-'

Error code	Error message	Description
20235	Tiling schema name is required	Tiling schema name is required
20236	Tiling schema short name must be less than 30 characters	Tiling schema short name must be less than 30 characters
20237	Tiling schema short name must only contain letters, digits and '-'	Tiling schema short name must only contain letters, digits and '-'
20238	Tiling schema short name is required	Tiling schema short name is required
20239	Tiling schema zoom level must only contain digits	Tiling schema zoom level must only contain digits
20240	Tiling schema zoom level is required	Tiling schema zoom level is required
20241	Organisationen kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodel, service eller dataset	Organisationen kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodel, service eller dataset
20242	Rollen kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodel, service eller dataset	Rollen kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodel, service eller dataset
20243	Entiteten kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodelclass	Entiteten kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodelclass
20244	Entiteten kan ikke slettes da den allerede anvendes af en eller flere entiter af typen dataset	Entiteten kan ikke slettes da den allerede anvendes af en eller flere entiter af typen dataset
20245	Entiteten kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodelattribute	Entiteten kan ikke slettes da den allerede anvendes af en eller flere entiter af typen datamodelattribute

Error code	Error message	Description
20246	Service uuid is null or empty.	Service uuid is null or empty.
20247	Service name is null or empty.	Service name is null or empty.
20248	DataAuthority not found	DataAuthority not found
20249	DatamodelAttribute section 'root' does not exist	DatamodelAttribute section 'root' does not exist
20250	DatamodelClass section 'root' does not exist	DatamodelClass section 'root' does not exist
20251	Datamodel section 'root' does not exist	Datamodel section 'root' does not exist
20252	MetadataSchema for datamodelAttribute not found	MetadataSchema for datamodelAttribute not found
<b>20253</b>	MetadataSchema for datamodelClass not found	MetadataSchema for datamodelClass not found
<b>20254</b>	MetadataSchema for datamodel not found	MetadataSchema for datamodel not found
202453	MetadataSchema for datamodelClass not found.	MetadataSchema for datamodelClass not found.
202454	MetadataSchema for datamodel not found.	MetadataSchema for datamodel not found.
<b>20255</b>	MetadataSchema not found	MetadataSchema not found
20256	Xml file cannot be null or empty	Xml file cannot be null or empty
20257	Attempt to submit invalid replication channel data	Attempt to submit invalid replication channel data

Error code	Error message	Description
20258	Venligst angiv prioritet for tjenesten	Venligst angiv prioritet for tjeneste
20259	It is possible to use another data authority data model for specialised models only.	It is possible to use another data authority data model for specialised models only.
20260	When selected Pull Agent for replication channel you need to specify pull sftp user certificate private key.	When selected Pull Agent for replication channel you need to specify pull sftp user certificate private key.
20261	When selected Pull Agent for replication channel you need to specify pull sftp endpoint.	When selected Pull Agent for replication channel you need to specify pull sftp endpoint.
20262	When selected Pull Agent for replication channel you need to specify pull sftp user name.	When selected Pull Agent for replication channel you need to specify pull sftp user name.
20263	Operation name already in use. Choose other operation name.	Operation name already in use. Choose other operation name.
20264	Operation Name has to be alphanumeric	Operation Name has to be alphanumeric
20265	Not allowed characters in search phrase. Only alphanumerical characters underscores and dashes are allowed in search phrase.	Not allowed characters in search phrase. Only alphanumerical characters underscores and dashes are allowed in search phrase.
20266	Data Operation Parameter Name is required and can't be any of: format, jsonpCallback, page, pagesize and count	Data Operation Parameter Name is required and can't be any of: format, jsonpCallback, page, pagesize and count

Error code	Error message	Description
20267	Data Operation SQL Parameter Name is required and can't be any of: page, pagesize and offset	Data Operation SQL Parameter Name is required and can't be any of: page, pagesize and offset
20268	Default value <now> is valid for datetime type only.	Default value <now> is valid for datetime type only.
20269	Det angivne tiling skema kort navn er allerede i brug. Venligst vælg et andet tiling skema kort navn.	Tiling schema short name already in use. Choose other tiling schema short name.
20270	Zoom level {0} cannot have smaller value than zoom level {1}. Adjust one of this values.	Zoom level {0} cannot have smaller value than zoom level {1}. Adjust one of this values.
20271	Provide SLA Target	Provide SLA Target
20272	SLA Target must be a number	SLA Target must be a number
20273	At least one data operation is required.	At least one data operation is required.
20274	Parameternavn is required for operation parameter {0}	Parameternavn is required for operation parameter {0}
20275	SQL parameter is required for operation parameter {0}	SQL parameter is required for operation parameter {0}
20276	Default value is required for operation parameter {0}	Default value is required for operation parameter {0}
20277	default value is not integer for operation parameter {0}	default value is not integer for operation parameter {0}
20278	default value is not boolean for operation parameter {0}	default value is not boolean for operation parameter {0}

Error code	Error message	Description
20279	default value is not float for operation parameter {0}	default value is not float for operation parameter {0}
20280	default value is not date for operation parameter {0}	default value is not date for operation parameter {0}
20281	JSON schema is required.	JSON schema is required.
20282	Max Object Count must be a number	Max Object Count must be a number
20283	Sidestørrelse skal være større end 0	Sidestørrelse skal være større end 0
20284	Selected file was not recognised as FME Workspace Definition file. Please choose another file.	Selected file was not recognized as FME Workspace Definition file. Please choose another file.
20285	Der findes allerede en {0} tjeneste kaldet {1} i version {2}. Tjenester skal være unikke på tværs af navn, version og tjenestetype.	A {0} service named {1} already exists in version {2}. Services must be unique across name, version and service type.
20286	Tjenesteverision feltet må kun indeholde tal og tegnene (.)	Service name field must only include numbers and the characters (.)
20287	The given path does not contain a valid schema.	The given path does not contain a valid schema.
20288	Selected WMS service does not provide any required layers. select different WMS service.	Selected WMS service does not provide any required layers. select different WMS service.
20289	Select at least one WMS service layer.	Select at least one WMS service layer.
20290	Venligst angiv skabelonen for enten et xml eller et JSON data objekt	Please fill template for either xml or json data object

Error code	Error message	Description
20291	TMS services does not support Jpeg output.	TMS services does not support Jpeg output.
20292	Max zoom level cannot be bigger than min zoom level.	Max zoom level cannot be bigger than min zoom level.
20293	Please provide at least one fields match.	Please provide at least one fields match.
20294	Invalid zip file structure. Please provide valid zip file.	Invalid zip file structure. Please provide valid zip file.
20295	Select at least one output format	Select at least one output format
20296	Select output forma	Select output forma
20297	Selected files should be xml type	Selected files should be xml type
20298	Uploaded file is not correct or not provided	Uploaded file is not correct or not provided
20299	Error while parsing uploaded file	Error while parsing uploaded file
20300	Den valgte MAP fil er kodet i UTF-8 BOM (byte order mark). Venligst overfør en fil, der ikke er BOM kodet.	Provided file encoding contains BOM mark. Please provide map file with UTF-8 encoding without BOM mark.
20301	Navn på begrænsning kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Constraint name may consist of a combination of lowercase and uppercase letters as well as numbers and hyphen
20302	Kort navn på begrænsning kan bestå af en kombination af små og store bogstaver samt tal og bindestreg.	Constraint short name may consist of a combination of lowercase and uppercase letters as well as numbers and hyphen.

Error code	Error message	Description
20303	De angivne metadata er allerede indlæst	The specified metadata is already importer. Check logs for details
20304	Det kortnavn du har valgt er allerede i brug. Vælg venligst et andet kortnavn	The shortname you have selected is already in use. Please choose another shortname.
20305	WCS services supprot only one projection.	WCS services support only one projection.
20306	Der blev identificeret kolonner i GPP filen ({0}), der ikke er blevet mappede. Disse vil blive fjernet.	Unmapped columns were found in gpp file ({0}) and are going to be removed.
20307	Der blev identificeret tabeller i GPP filen ({0}), der ikke er blevet mappede. Disse vil blive fjernet.	Unmapped tables were found in gpp file ({0}) and are going to be removed.
20308	Der blev identificeret kortlag i MAP filen ({0}), der ikke er blevet mappede. Disse vil blive fjernet.	Unmapped layers were found in map file ({0}) and are going to be removed.
20309	Der blev identificeret felter i MAP filen ({0}), der ikke er blevet mappede. Disse vil blive fjernet.	mapped fields were found in map file ({0}) and are going to be removed.
20310	InvalidDataModels-MissingLoadDataModel	InvalidDataModels-MissingLoadDataModel
20311	InvalidDataModels-MissingDeliveryDataModel	InvalidDataModels-MissingDeliveryDataModel
20312	InvalidDataModels-EntityCountDoesNotMatchBetweenLoadAndDeliveryModel	InvalidDataModels-EntityCountDoesNotMatchBetweenLoadAndDeliveryModel
20313	InvalidDataModels-FieldsCountDoesNotMatch	InvalidDataModels-FieldsCountDoesNotMatch

Error code	Error message	Description
20314	Der var en fejl ved opdatering af servicen.	There was an error while updating the service.
20315	Der var en fejl ved oprettelse af servicen.	There was an error while creating the service.

### 3.3.5 ERROR CODES 4XXXX: ERROR CODES USED IN UPDATE AGENT

Error code	Error message	Description
<b>40101</b>	[CHANNEL {0}] Received file with wrong replication channel ID: {1}	<p>Please ensure that you are uploading file to the right FTP account.</p> <p>Also make sure that the file's name is correct. It should have name in a format RCid-sqn.ext, where "id" is replication channel identifier, "sqn" is the sequence number, "ext" is the file extension, i.e. RC1-1.zip.</p>
40102	[CHANNEL {0}] Received file with wrong sequence number: {1}. Expected sequence number: {2}	A file that you uploaded has two low sequence number that means that it was previously processed. Check the message for an information on which sequence number is expected.
40103	[CHANNEL {0}] Received file with wrong name: {1}	An uploaded file has bad name. It should have name in a format RCid-sqn.ext, where "id" is replication channel identifier, "sqn" is the sequence number, "ext" is the file extension, i.e. RC1-1.zip.
40104	[CHANNEL {0}] Sanity check failed: {1}	A file that you uploaded has invalid structure or invalid data. Check the error message for the detailed cause of that error.
40105	[CHANNEL {0}] Error while processing files	There was an error while processing a file. Check the error message for further information. If this cannot help you, contact system operator.
40106	Error while updating channel state	<p>There was a connectivity error to Model or State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Model database is down</li> <li>• State database is down</li> </ul>

Error code	Error message	Description
		<ul style="list-style-type: none"> <li>• Connection between Update Agent and Model database is broken</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to Model database is wrong</li> <li>• Connection string to State database is wrong</li> </ul> <p>Check error message for further information.</p>
40107	[CHANNEL {0}] File {1} cannot be unpacked: {2}	<p>Update Agent couldn't unpack uploaded file. Verify that the file is a valid archive.</p> <p>Check error message for further information.</p>
40108	Error while getting job	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul> <p>Check error message for further information.</p>
40109	Error while getting job status	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul>

Error code	Error message	Description
Check error message for further information.		
40110	Error while getting waiting import	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul>
Check error message for further information.		
40111	Error while inserting job	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul>
Check error message for further information.		
40112	Error while setting job updating status	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul>
Check error message for further information.		

Error code	Error message	Description
40113	Error while setting job archiving status	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul> <p>Check error message for further information.</p>
40114	Error while incrementing sequence number	<p>There was a connectivity error to Model database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Model database is down</li> <li>• Connection between Update Agent and Model database is broken</li> <li>• Connection string to Model database is wrong</li> </ul> <p>Check error message for further information.</p>
40115	Error while updating job process ID	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul> <p>Check error message for further information.</p>
40116	Error while resetting job	There was a connectivity error to State database.

Error code	Error message	Description
		<p>Possible causes:</p> <ul style="list-style-type: none"> <li>• State database is down</li> <li>• Connection between Update Agent and State database is broken</li> <li>• Connection string to State database is wrong</li> </ul> <p>Check error message for further information.</p>
40117	[CHANNEL {0}] Error while saving replication channel	<p>There was a connectivity error to Model database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Model database is down</li> <li>• Connection between Update Agent and Model database is broken</li> <li>• Connection string to Model database is wrong</li> </ul> <p>Check error message for further information.</p>
40118	Generic Error	Generic Error
40119	ImporterProcessHandler Error	Importer process handler error.
40120	No update agent with name {0} in database.	<p>Table Agent in Model database does not contain a row for the hosting Update Agent is operating on.</p> <p>Check the table and verify whether it contains agent with the name stated in error message.</p>
40121	Error while maintaining channels reassignment	<p>There was a connectivity error to Model database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Model database is down</li> <li>• Connection between Update Agent and Model database is broken</li> </ul>

Error code	Error message	Description
		<ul style="list-style-type: none"> <li>• Connection string to Model database is wrong</li> </ul> <p>Check error message for further information.</p>
40122	Error while getting channels	<p>There was a connectivity error to Model database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Model database is down</li> <li>• Connection between Update Agent and Model database is broken</li> <li>• Connection string to Model database is wrong</li> </ul> <p>Check error message for further information.</p>
40123	Unhandled exception occurred in Update.Agent	<p>There was an unhandled error in Update Agent. Check the error message for further information. If this cannot help you, contact system operator.</p>
40124	Unhandled exception occurred in Proactive Synchronization Agent	<p>There was an unhandled error in Proactive Synchronization Agent. Check the error message for further information. If this cannot help you, contact system operator.</p>
40125	No update agent with name {0} and type {1} in database.	<p>Table Agent in Model database does not contain a row for the hosting Update Agent is operating on. Check the table and verify whether it contains agent with the name stated in error message.</p>
40126	[CHANNEL {0}] There was an error while removing Geo Files	<p>There was an error while removing Geo Files from Model database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>– Model database is down</li> <li>– connection between Update Agent and Model database is broken</li> </ul>

Error code	Error message	Description
		<ul style="list-style-type: none"> <li>– connection string to Model database is wrong</li> </ul> <p>Check error message for further information.</p>
40127	Error while setting job importing status	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>– State database is down</li> <li>– connection between Update Agent and State database is broken</li> <li>– connection string to State database is wrong</li> </ul> <p>Check error message for further information.</p>
40128	[CHANNEL {0}] Connectivity error during sanity check: {1}	<p>There was a database connectivity error during sanity check.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>– Load, Publish or Specialized Publish database is down</li> <li>– connection between Update Agent and Load/Publish/Specialized Publish database is broken</li> <li>– connection string to Load, Publish or Specialized Publish database is wrong</li> </ul> <p>Check error message for further information.</p>
40129	Error while updating job Sanity Check status	<p>There was a connectivity error to State database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>– State database is down</li> <li>– connection between Update Agent and State database is broken</li> <li>– connection string to State database is wrong</li> </ul>

Error code	Error message	Description
Check error message for further information.		
40130	[CHANNEL {0}] Unable to delete file {1}. Reason: {2}. Processes locking the file: {3}. Operation will be retried	Unable to delete file. Check error message for more information.

### 3.3.6 ERROR CODES 5XXXX: ERROR CODES USED IN DATA IMPORT

Error code	Error message	Description
50100	No arguments for DataImport	The Dataimporter has been called without any arguments - the Update Agent must at least supply the arguments: ReplicationChannelId and JobId.
50101	No valid replication channel as argument for DataImport:	First argument to Data Importer was not a valid integer.
50102	No valid job id as argument for DataImport:	Second argument to Data Importer was not a valid integer.
50103	InsertCommand ExecuteSQL Error	<p>An insert has failed with an error different from "Duplicate Key" (Duplicate key will normally trigger an update - if allowed).</p> <p>Possible cause could be one of:</p> <ul style="list-style-type: none"> <li>• Database unavailable</li> <li>• Metadata not properly configured</li> </ul> <p>Examine the additional info in the log entry.</p>
50104	DataImporter caught an exception	An "unexpected exception" was caught under data import in the outermost try-catch statement to "handle" exceptions that otherwise would appear unhandled. Examine the log entry for more details.
50105	DataEntry failed, incorrect initial state. Was:	<p>The data loader is only allowed to run if its initial state is valid.</p> <p>The DataImporter expects the Job status (in the sys_job table) to be 1002 the first time the dataimporter handles a job (ZIP file) - or 2000 if it's a retry operation.</p>

Error code	Error message	Description
50106	DataEntry failed, file not found:	The file entered in field "filename" in the sys_job table is not found.
50107	DataEntry failed, table had no content	Content of XML has what seems to be a valid table-tag - but no field-tags were found.
50108	DataEntry failed, Action-tag is not the first tag within a record	By convention the first "field tag" of a table element *MUST* be an Action tag.
50109	Mappings in Model database not found for replication channel Id:	There is no metadata for the requested replication channel in the Model database. Most likely metadata has not been imported from the originating system (i.e. From Test to Production).
50110	{0} is not valid CommitScopeSize value	The CommitScopeSize has been set to 0 (or less) in the table SecurityZoneConnection in the Model database (S5) for the replication channel in question.
50111	SYNC data set contains non-SYNC files:	-Sync was included as a command line argument - but the XML file does not have DeliveryType = SYNC (DeliveryType tag in header of XML file)
50112	Non-SYNC data set contains SYNC files:	The XML File has delivery type set to SYNC - but the dataimporter was not started with -Sync as command line parameter.
50113	DataEntry TimeOut	From time to time the PostGreSQL data is unresponsive when inserting data, this may result in a time out exception. The Import Agent is notified that it should retry the DataImport immediately, most likely solving the timeout problem.  Source of Time out: Deliverer -> Master Load.

Error code	Error message	Description
50114	DataEntry failed:	An a non-NPGSQL exception har been caught during database Insert/update/Delete - It's most likely a data conversion error.  A non-NPGSQL exception was caught during database Insert/update/Delete. It is most likely a data conversion error.
50115	DataEntry retry failed in record: {0} of table: {1} in import filer: {2}	Upsert mechanism failed reading data into Master Load - most likely a partial update with a primary key not found in the PostgreSQL table.
50116	DataEntry failed, incorrect initial state. Was:	Upsert mechanism failed reading data into Master Load - most likely a partial update with a primary key not found in the PostgreSQL table.
50117	DataImporter caught an sql time-out exception	From time to time the PostGreSQL data is unresponsive when inserting data, this may result in a time out exception. The Import Agent is notified that it should retry the DataImport immediately, most likely solving the timeout problem.  Source of Time out: Master Load -> Master Publish
50118	DataImporter caught an sql exception	In the Master Load -> Master Publish section, a prepared statement most likely has a syntax error or is referring tables or fields not found in the physical table. The cause is most likely wrongful configuration of model data.
50119	DataImporter caught an exception	A non-NPGSQL exception was caught during database Insert/update/Delete. It is most likely a data conversion error. It could be caused by mismatch between model data and the physical table.

Error code	Error message	Description
50120	DataEntry failed, incorrect initial state. Was:	The data loader is only allowed to run if its initial state is valid.  The DataImporter expects the Job status (in the sys_job table) to be 1002 the first time the dataimporter handles a job (ZIP file) - or 2000 if it's a retry operation.
50121	DataImporter caught an sql time-out exception	From time to time the PostGreSQL data is unresponsive when inserting data, this may result in a time out exception. The Import Agent is notified that it should retry the DataImport immediately, most likely solving the timeout problem.  Source of Time out: Master Publish -> Specialized.
50122	DataImporter caught an sql exception	In the Master Publish -> Specialized section, a prepared statement most likely has a syntax error or is referring tables or fields not found in the physical table. The cause is most likely wrongfull configuration of model data.
50123	DataImporter caught an exception	A non-NPGSQL exception was caught during database Insert/update/Delete. It is most likely a data conversion error. It could be caused by mismatch between model data and the physical table.
50124	DataEntry failed	DataEntry failed
50125	DataEntry failed, Action-tag is not the first tag within a record	By convention the first "field tag" of a table element *MUST* be a Action tag.
50126	DataEntry failed, file not found:	DataEntry failed, file not found:
50127	DataEntry failed, incorrect initial state. Was:	DataEntry failed, incorrect initial state. Was:

Error code	Error message	Description
50128	DataEntry failed, table had no content	DataEntry failed, table had no content
50129	DataEntry TimeOut	DataEntry TimeOut
50130	Datalimporter caught an sql exception	Datalimporter caught an sql exception
50131	Not enough arguments for Datalimport	Not enough arguments for Datalimport
50132	XML Header does not contain header field:	The header section of a XML-file is missing a specified TAG/Field
50200	Missing command line arguments for Replication channel and/or JobId	Specify RC and I
50201	Replication channel {0} not found in the ReplicationChannel table!	Replication channel {0} not found in the ReplicationChannel table!
50202	Job id not found in the sys_job table!	Job id not found in the sys_job table!
50203	Job id not specified for the Event importer	Job id not specified for the Event importer
50204	General exception caught by event importer!	General exception caught by event importer!
50205	General Npgsql exception caught by event importer!	General Npgsql exception caught by event importer!
50206	Replicationchannel not specified for the Event importer	Replicationchannel not specified for the Event importer
50207	The ReplicationChannelId (=0) specified as a commandline argument does not match the ReplicationChannelId (=1) in the job table!	The ReplicationChannelId (=0) specified as a commandline argument does not match the ReplicationChannelId (=1) in the job table!

### 3.3.7 ERROR CODES 6XXXX: ERROR CODES USED IN ARCHIVE AGENT

Error code	Error message	Description
60100	Cannot find an agent with name {0} and type {1}	<p>Agent configuration was not found in the configuration database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Wrong connection string</li> <li>• Missing database entry for given agent</li> </ul>
60101	Archive agent unhandled exception	<p>Unknown error occurred.</p> <p>Check error message for further information.</p>
60102	HandleUpdateAgentAssignedEvent	<p>There was an error during processing message taken from queue.</p> <p>Agent was unable to process assignment/reassignment to replication channel.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Service bus queue communication error</li> <li>• Wrong connection string</li> <li>• Database error</li> </ul> <p>Check error message for further information.</p>

### 3.3.8 ERROR CODES 7XXXX: ERROR CODES USED IN MONITORING COMPONENT IN ADMINISTRATION PORTAL

Error code	Error message	Description
70001	Connection timeout occurred in Monitoring Agent	Connection timeout occurred in Monitoring Agent
70100	'Til dato' skal være større end 'Fra dato'.	Valideringsbesked der gives, hvis datointerval er ugyldigt for søgning i monitorering pga. fra dato der ligger efter til dato.
70101	Datointerval er for stort. Maksimalt tilladte datointerval er {0} dage.	Valideringsbesked der gives, hvis datointerval er ugyldigt for søgning i monitorering pga. for stort datointerval. Den maksimalt tilladte værdi er konfigurerbar.
70102	ConfigurationErrorsException	ConfigurationErrorsException

### 3.3.9 ERROR CODES 9XXXX: ERROR CODES USED IN SWITCHBOARD

Error code	Error message	Description
90000	Error occurred while connecting the server	Could not connect to backend server (for example incorrect backend url address)  HttpStatusCode="500"
90002	Server connection timeout	Backend server request timeout occurred  HttpStatusCode="500"
90003	Backend server request timeout occurred	An error occurred while canonicalizing the request (incorrect request parameter, unsupported projection etc.). The exception messages are defined in the switchboard code in request canonicalizers. More details about the exception can be found in event log  HttpStatusCode="500"
90005	Internal server error	An incorrect file path has been specified (for example for a certificate, ErrorCodes.xml, capabilities files etc.) An information about the file with incorrect file path specified can be found in the event log  HttpStatusCode="500"
90006	Service has not been found	The requested service has not been found  HttpStatusCode="404"
90007	Unauthorized access	Incorrect credentials has been specified (for example incorrect username or password)  HttpStatusCode="401"
90008	Unauthorized access	Incorrect credentials has been specified (for example incorrect username or password)

Error code	Error message	Description
		HttpStatusCode="403"
90009	Invalid request	User attempts to retrieve the ticket using their username and password but the simple credentials are not allowed  HttpStatusCode="405"
90010	Bad request	Attempt to send the request using the http protocol (where only https is allowed); The request is missing some parameter(s) for example data authority; Query string is empty; etc.  HttpStatusCode="400"
90011	Internal server error	Unexpected exception that occurred in the switchboard  HttpStatusCode="500"
90012	Internal server error	The configuration of the switchboard is incorrect (for example the switchboard has been set to prioritized - &lt;add key="switchboard:PrioritizedEndpoint" value="true"/&gt; - and the switchboard service, for example a WMS, has it's priority set to "Unprioritized") The information about the service that causes configuration issues can be found in the event log  HttpStatusCode="500"
90013	Internal server error	Exception returned by the backend server that is on the 'white list' which means that it does not contain any confidential data (like backend server IP address etc), and it's message can be displayed to the user without any modifications  HttpStatusCode="500"

Error code	Error message	Description
90014	Internal server error	An error occurred while canonicalizing the request (incorrect request parameter, missing mandatory parameter etc.). The exception messages are defined in the switchboard code in request canonicalizers. More details about the exception can be found in event log.  HttpStatusCode="500"
90015	Internal server error	Filter Polygon does not exist in the Filter Polygon database  HttpStatusCode="500"
91000	SaltStack command completed with wrong exit code	SaltStack command completed with wrong exit code

### 3.3.10 ERROR CODES 10XXXX: ERROR CODES USED IN MONITOR WEB AGENT SERVICE

Error code	Error message	Description
100100	Exception while handling MonitorEvent in MonitorWebAgent.	Exception while handling MonitorEvent in MonitorWebAgent.
100101	Unhandled exception occurred in MonitorWebAgent	Unhandled exception occurred in MonitorWebAgent

**3.3.11 ERROR CODES 11XXXX: ERROR CODES USED SERVICE DEPLOY AGENT I  
SELF-SERVICE PORTAL**

Error code	Error message	Description
110100	The validation errors are:	<p>There were validation errors while saving data to database. Check error message for further information. If it doubt, contact system operator.</p>
110101	HandleServiceCreatedEventDbError	<p>There was a connectivity error to SelfService database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• SelfService database is down</li> <li>• Connection between SelfService ServiceDeployAgent and SelfService database is broken</li> <li>• Connection string to SelfService database is wrong</li> </ul> <p>Check error message for further information.</p>
110102	The validation errors are:	<p>There were validation errors while saving data to database. Check error message for further information. If it doubt, contact system operator.</p>
110103	HandleServiceUpdatedEventDbError	<p>There was a connectivity error to SelfService database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• SelfService database is down</li> <li>• Connection between SelfService ServiceDeployAgent and SelfService database is broken</li> <li>• Connection string to SelfService database is wrong</li> </ul>

Error code	Error message	Description
		Check error message for further information.
110104	The validation errors are:	<p>There were validation errors while saving data to database. Check error message for further information. If in doubt, contact system operator.</p>
110105	HandleServiceDeletedEventDbError	<p>There was a connectivity error to SelfService database.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• SelfService database is down</li> <li>• Connection between SelfService ServiceDeployAgent and SelfService database is broken</li> <li>• Connection string to SelfService database is wrong</li> </ul>
		Check error message for further information.
110106	Unhandled exception occurred in Service Deploy Agent	<p>There was an unhandled error in SelfService ServiceDeployAgent. Check the error message for further information. If this cannot help you, contact system operator.</p>
110107	ServiceWorker Thread Unhandled Exception In Service DeployAgent	<p>There was a connectivity error to ServiceBus.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• ServiceBus is down</li> <li>• Connection between SelfService ServiceDeployAgent and ServiceBus is broken</li> <li>• Connection string to ServiceBus is wrong</li> </ul>
		Check error message for further information.



### 3.3.12 ERROR CODES 12XXXX: ERROR CODES USED IN SOAP REGISTER DATA SERVICE

Error code	Error message	Description
120100	Access Denied	<p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Given user does not have a role with proper privilege/constraint assigned</li> <li>• Wrong ADFS server address</li> </ul> <p>Check error message for further information.</p>
120101	Error occurred while trying to process data on data deliver service. Replicationcationchanellid: {0} Sequencenumber: {1}.	<p>Error occurred while trying to process data on data deliver service.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Connection string to Model database is wrong</li> <li>• Missing ReplicationChannel for given id in the requestCheck error message for further information.</li> <li>• Message validation failed (check error message for further information)</li> </ul>
120102	Unhandled exception occurred in service	<p>Unknown error occurred.</p> <p>Check error message for further information.</p>
<b>120103</b>	Unable to write flag file due to insufficient IO rights.	Unable to write flag file due to insufficient IO rights.
<b>120104</b>	Unable to write flag file due to the path to the flag file destination being null.	Unable to write flag file due to the path to the flag file destination being null.
<b>120105</b>	Unable to write flag file due to the path to the flag file destination being malformed.	Unable to write flag file due to the path to the flag file destination being malformed.

Error code	Error message	Description
<b>120106</b>	Unable to write flag file due to the path to the flag file destination being too long.	Unable to write flag file due to the path to the flag file destination being too long.
<b>120107</b>	Unable to write flag file due to the path to the flag file directory not existing.	Unable to write flag file due to the path to the flag file directory not existing.
<b>120108</b>	Unable to write flag file due to the operation not being supported.	Unable to write flag file due to the operation not being supported.
<b>120109</b>	Unable to write flag file due to errors with the filesystem.	Unable to write flag file due to errors with the filesystem.

**3.3.13 ERROR CODES 13XXXX: ERROR CODES USED IN SOAP DELIVERY RECEIPT SERVICE**

Error code	Error message	Description
130100	Access Denied	<p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Given user does not have a role with proper privilege/constraint assigned</li> <li>• Wrong ADFS server address</li> </ul> <p>Check error message for further information.</p>
130101	Error occurred while trying to generate a receipt in the receipt service. Replicationcationchanellid: {0} Max Entries Quantity: {1}.	<p>Error occurred while trying to generate a receipt in the receipt service.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>• Connection string to Model database is wrong</li> <li>• Missing ReplicationChannel for given id in the request</li> <li>• Connection string to Model database is wrong</li> </ul> <p>Check error message for further information.</p>
130102	Unhandled exception occurred in service	<p>Unknown error occurred.</p> <p>Check error message for further information.</p>
130103	Error occurred while trying to insert a delivery disturbance entry. Replication channel id : {0}	<p>Error occurred while trying to generate delivery disturbance entry.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> <li>- connection string to Model database is wrong</li> <li>- missing ReplicationChannel for given id in the request</li> </ul>

Error code	Error message	Description
		Check error message for further information.
130104	Unknown error occured.  Check error message for further information.	Unknown error occured.  Check error message for further information.
130105	Error occured while trying to alter a delivery disturbance entry. Disturbance identifier: {0}	Error occurred while trying to alter delivery disturbance entry.  Possible causes:  - connection string to Model database is wrong  - missing delivery disturbance with given id  Check error message for further information.

**3.3.14 ERROR CODES 14XXXX: ERROR CODES USED IN SANITY CHECK**

Error code	Error message	Description
140100	First record of check file does not match XML content:	The validation of uploaded XML file against CHK file failed because the first records in XML and CHK files do not match. Probably XML file is invalid. Check message text for details on error.
140101	CheckFile Sanity check failed:	The validation of uploaded XML file against CHK file failed because the last records in XML and CHK files do not match. Probably XML file is invalid. Check message text for details on error.
140102	DataEntry failed:	The validation of uploaded XML file against CHK file failed because the first or last records in XML and CHK files do not match. Probably XML file is invalid. Check message text for details on error.
140103	Sanity check caught an exception	Sanity check caught an exception
140104	Header Sanity Check Failed:	The validation of header of uploaded XML file failed. Probably XML file is invalid. Check message text for details on error.
140105	Header Sanity Check caught an exception:	The validation of header of uploaded XML file failed. Probably XML file is invalid. Check message text for details on error

**3.3.15 ERROR CODES 15XXXX: ERROR CODES USED IN OTHER PLACES**

Error code	Error message	Description
150100	Error while getting job.	Error while getting job.
150101	Error while getting job status.	Error while getting job status.
150102	Error while incrementing sequence number	Error while incrementing sequence number
150103	Error while getting waiting import	Error while getting waiting import
150104	Error while inserting job	Error while inserting job
150105	Error while resetting job	Error while resetting job
150106	Error while setting job archiving status	Error while setting job archiving status
150107	Error while setting job updating status	Error while setting job updating status
150108	Error while updating channel state	Error while updating channel state
150109	Error while updating job process ID	Error while updating job process ID
150110	File: {0}, does not exist	File: {0}, does not exist
150111	Mappings in Model database not found for replication channel Id:	Mappings in Model database not found for replication channel Id:

**3.3.16 ERROR CODES 16XXXX: ERROR CODES USED IN EVENTS**

Error code	Error message	Description
160000	UpdateStatus, ImportState and SelectThreshold are not specified correct.	UpdateStatus, ImportState and SelectThreshold are not specified correct

Error code	Error message	Description
160001	Can not find the job.	Can not find the job.
160002	Job do not belong to the replication channel.	Job do not belong to the replication channel.
160100	Outer exception caught in CleanEventMessage Agent.	Outer exception caught in CleanEventMessage Agent.
160200	Too many synchronization errors.	Too many synchronization errors.

### 3.3.17 ERROR CODES 17XXXX: ERROR CODES USED IN AUTHORIZATION SERVICE

Error code	Error message	Description
<b>170000</b>	Unhandled error occured in the OIOIDWS REST service.	Unhandled error occured in the OIOIDWS REST service.
<b>170001</b>	The client certificate could not be verified.	The client certificate is invalid.
<b>170002</b>	The XML could not be parsed into a valid SAML2Token.	The content of the SAML2Token stored in the token cache was invalid.
<b>170003</b>	There was no certificate located in the header.	The certificate was not specified in the header of the SAML2Token.
<b>170004</b>	The certificate chain could not be validated.	The certificate chain could not be validated. The client certificate specified in the header is invalid.
<b>170005</b>	An error occurred while parsing XML to SAML2SecurityToken. The XML could not be read into a SAML2SecurityToken.	An error occurred while parsing XML to SAML2SecurityToken. The XML could not be read into a SAML2SecurityToken.
<b>170006</b>	An error occurred while parsing XML to SAML2SecurityToken. The SAML2Token as not issued in a Holder-of-Key context.	An error occurred while parsing XML into a Saml2SecurityToken. The SAML2Token as not issued in a Holder-of-Key context.
<b>170007</b>	An error occurred while parsing XML to SAML2SecurityToken. The SAML2Token did not contain any ClaimsIdentity. This is not supported.	The SAML2Token must contain exactly one ClaimIdentity. The SAML2Token contained no ClaimIdentity.
<b>170008</b>	An error occurred while parsing XML to SAML2SecurityToken. The SAML2Token	The SAML2Token must contain exactly one ClaimIdentity. The SAML2Token contained more than one ClaimIdentity.

Error code	Error message	Description
	contains multiple ClaimsIdentities. This is not supported.	
<b>170009</b>	The supplied SAML2Token did not contain an AudienceRestriction element.	The supplied SAML2Token did not contain an AudienceRestriction element.
<b>170010</b>	The SAML2Token did not contain an audience URI.	The SAML2Token did not contain an audience URI. This is required.
<b>170011</b>	The SAML2Token had an incorrect audience URI.	The format of the audience URI was incorrect.
<b>170012</b>	The privileges were not present in the profile XML.	The SAML2Token issued for the user did not contain the privileges required to access the requested service.
<b>170013</b>	Privileges could not be converted into internal format.	The privileges contained in the SAML2Token could not be converted into the Datafordeler data authority URN format because they were incorrectly formatted.
<b>170014</b>	SAML2Token profiles section is invalid.	The profiles section of SAML2Token was incorrectly formatted and could not be parsed.
<b>170015</b>	The privileges claim could not be decoded.	The privileges claim could not be base64 decoded, as it was incorrectly encoded.
<b>170016</b>	The SAML2Token XML was not set.	The decoded SAML2Token did not contain valid XML.
<b>170017</b>	Invalid format of the entity id.	The format of the entity id was invalid.
<b>170018</b>	Unable to base64 encode SAML2Token.	The SAML2Token could not be base64 encoded because it was invalid.
<b>170019</b>	The client certificate did not match the SAML2Token client certificate.	The client certificate did not match the certificate used when the SAML2Token was issued from SubjectConfirmationData.
<b>170020</b>	The SAML2Token could not be decoded.	The SAML2Token could not be decoded, as it was not properly base64 encoded.
<b>170021</b>	User provided an expired token.	The SAML2Token has expired, and is not valid.

## 4 EVENT PUSH CLIENT STATUS/ERROR CODES AND MESSAGES

Code	Description	Detailed information
0	Success	No error was encountered.
1	NameResolutionFailure	The name resolver service could not resolve the host name.
2	ConnectFailure	The remote service point could not be contacted at the transport level.
3	ReceiveFailure	A complete response was not received from the remote server.
4	SendFailure	A complete request could not be sent to the remote server.
5	PipelineFailure	The request was a pipelined request and the connection was closed before the response was received.
6	RequestCanceled	The request was canceled, the WebRequest.Abort method was called, or an unclassifiable error occurred.
7	ProtocolError	The response received from the server was complete but indicated a protocol-level error. For example, an HTTP protocol error such as 401 Access Denied would use this status.
8	ConnectionClosed	The connection was prematurely closed.
9	TrustFailure	A server certificate could not be validated.
10	SecureChannelFailure	An error occurred while establishing a connection using SSL.
11	ServerProtocolViolation	The server response was not a valid HTTP response.
12	KeepAliveFailure	The connection for a request that specifies the Keep-alive header was closed unexpectedly.
13	Pending	The name resolver service could not resolve the host name.

Code	Description	Detailed information
14	Timeout	No response was received during the time-out period for a request.
15	ProxyNameResolutionFailure	The name resolver service could not resolve the proxy host name.
16	UnknownError	An exception of unknown type has occurred.
17	MessageLengthLimitExceeded	A message was received that exceeded the specified limit when sending a request or receiving a response from the server.
18	CacheEntryNotFound	The specified cache entry was not found.
19	RequestProhibitedByCachePolicy	The request was not permitted by the cache policy. In general, this occurs when a request is not cacheable and the effective policy prohibits sending the request to the server. You might receive this status if a request method implies the presence of a request body, a request method requires direct interaction with the server, or a request contains a conditional header.
20	RequestProhibitedByProxy	This request was not permitted by the proxy.